

Ethernet over Coaxial Modem EC310C




General Description

Yoda' EC310C is the latest technological innovation of HomePNA3.1 Ethernet Bridge over coaxial cable. EC-310C is designed for home and office applications that leverage the two most popular network connections for home use: 10/100Mbps Ethernet connection and coaxial cable connection.

It is a norm that homes and offices are equipped with wired network that simply transfer small files and shared applications, but the need for triple play services like transferring large multimedia files such as music, video, photo and deliver high speed VoIP data are ever increasing.

This is why EC310C is designed to be a cost effective home networking solution. With plug & play, this simply eliminates the pain in modification and high infrastructure cost. With the data transmission up to 200Mbps and distance up to 1220m (4000ft), it meets the growing demand for high speed multimedia services. Most importantly, with point-to-point and point-to-multipoint applications, it allows networking for any locations such as home, office, sports center, buildings, apartments, hotels, resorts and other places that need a high bandwidth network.

Point to Point Application

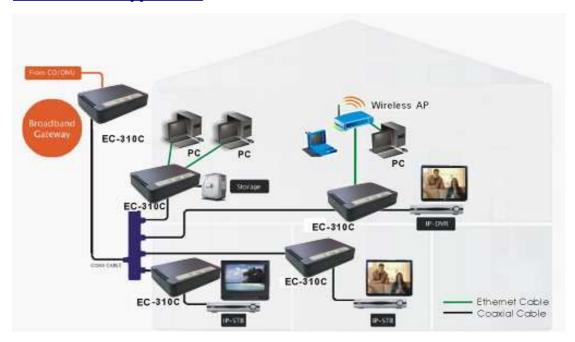

Key Features & Benefits

- Compliant with HomePNA3.1/HomePNA3.0 over Coaxial cable(HCNA) specifications (ITU-T G.9954)
- Compliant with IEEE802.3 10Base-T and IEEE802.3u 100Base-Tx standards
- Compliant with IEEE802.3x flow control standard
- Provides 2 x 10/100M auto-negotiation RJ-45 Ethernet ports with auto MDI/MDIX
- Provides 2 x f-type female coax connectors for HCNA and TV
- Supports transmission speed up to 200Mbps over coaxial cable and distance up to 1220m(4000ft) or -160dBm/Hz noise floor
- Supports point to point and point to multipoint application
- Supports IEEE802.1p priority mapping
- Supports IEEE802.1p/TOS priority queue
- Supports IEEE802.1Q Tag VLAN pass through
- Supports auto-speed from 4Mbps up to 200Mbps
- Guaranteed QoS based on HomePNA3.1 parameterized QoS
- EMI certified by CE and FCC

Product Specification

Standards: IEEE802.3 standard

IEEE802.3u standard

Compliant ITU-T G.9954 standard

Interfaces: 2 x RJ-45 10/100Mbps Ethernet port

1 x f-type female coax connector for HCNA 1 x f-type female coax connector for STB/TV

1 x 5Vdc 1A DC jack

Max. Bandwidth: Up to 200Mbps

Max Distance: 1220m (4000ft) over RG-59 coaxial cable

Max. Noise Floor: -160dBm/Hz

LED Indicators: 1 x Power LED

1 x HCNA Link/Activity LED 1 x HCNA Line Speed LED 2 x Ethernet Link/Activity LED

SAT HCNA Transmission

Spectrum:

Dimensions:

12MHz ~ 44MHz

Operating Temperature: $0^{\circ}\text{C} \sim 50^{\circ}\text{C} \ (32^{\circ}\text{F} \sim 122^{\circ}\text{F})$ Storage Temperature: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C} \ (-4^{\circ}\text{F} \sim 158^{\circ}\text{F})$ Humidity:10 to 95% (non-condensing)

 $(5.12" \times 3.72" \times 1.06")$

130mm x 94.5mm x 27 mm

Yoda Communications, Inc. www.yoda.com.tw

2F, No. 3-1, Industry East Road IX, Science Based Industrial Park, HsinChu, Taiwan

Tel:+886-3-563-2323 Fax:+886-3-563-6420