



## 8-p Web-Smart Midspan PoE Switch PW800MA



Its cost saving and centralized power distribution using of PoE, eight ports of PW800MA provides PoE power injecting function which is able to drive 8 x IEEE 802.3at/af, Mid-span compliant powered devices in the remote different locations. For small area such as home, SMB office, PW800MA provides a simple, cost-effective, and highly reliable network connection for data and power feeding remotely.

### **Advance and User-Friendly PoE Management Features**

The PW800MA offers PoE Power Control, PoE Priority Control, PoE Power Delay and PoE Scheduling on each PoE ports.

### **IEEE 802.3at/af Power Source Switch**

The PW800MA has (8) 10/100BASE-TX ports that support midspan PoE standards. It is designed to inject up to 30 Watts of power per port. Each port can automatically detect if any 802.3at/af, Mid-span compliant device is attached and supply power which will be automatically adjusted to fit into the device. The PW800MA also supports active circuit protection, which automatically disables a port if there is a short, while the other ports remain active.

### **Simple Wiring and Installation**

PW800MA reduces cables and eliminates the need for dedicated electrical outlets on the wall, ceiling or any unreachable place. Providing 8 PoE interfaces, the PW800MA is ideal for small business and workgroups requiring to deploy the PoE for the wireless access points, network camera or IP phones in any places easily.



## Easy Configuring Web Management Interface

The Web smart functions make it easy to survey and control the PoE power provision to the devices by the Web interface. Basic switching functions such as VLAN, Bandwidth Control, Storm Control and QoS are available for network management. The smart functions make it easy to survey and control the PoE power provision to the devices by the Web interface. Basic switching functions such as VLAN, Trunk, QoS are available for network management.


## Features

- PoE Power Control: Each PoE port able to enable or disable PoE output
- PoE Priority Control: prioritizes budgetary power to critical applications
- PoE Power Delay
- PoE Scheduling by 7 days x 24 hours base
- Up to 30W of power output per PoE port
- IEEE 802.3at/af, midspan PoE compliant
- Low power devices receive only the power they need
- Safe and reliable power to WLAN access points
- Automatic detection and protection of non-standard Ethernet terminals
- Supports 10/100 Base-T Ethernet
- Compact design fits easily in WLAN access
- Plug-and-Play with simple configuration required
- Internal power supply of upto 250w
- Easy installation and maintenance

## Application



## IP Telephony with Video Surveillance System

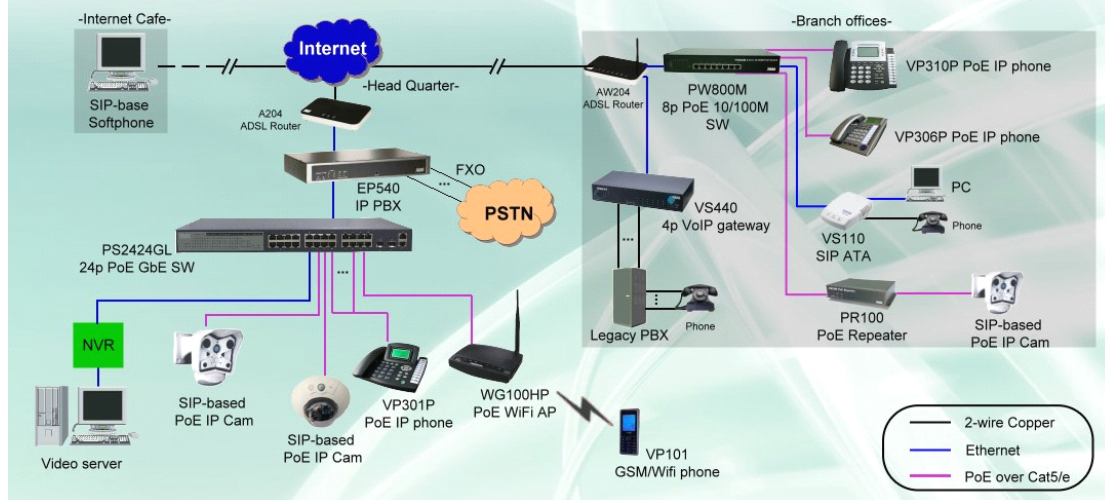

## Specification

### 8-Port Web Smart Mid-span PoE Switch

Model	PW800MA
<b>Hardware Specification</b>	
Network Connector	8-Port RJ-45 for 10/100Base-TX
PoE Inject Port	8-Port with PoE injector(PSE) function, Port-1 to Port-8
LED Display	One power 1-8 port PoE in-use, LNK / ACT 1-8 port LNK / ACT
Switch Architecture	Store and Forward switch architecture
Switch Fabric	1.6Gbps
MAC Address	1K MAC address table with Auto learning function
Power	AC 100~240V, 50/60Hz,
Power Consumption	Internal Power, Max. 250 watts
Dimension (W x D x H)	262 x 160 x 44 mm
Weight	2.2 kgs
<b>Power over Ethernet</b>	
PoE Standard	IEEE 802.3at/af, Mid-span Power over Ethernet / PSE
PoE Power Supply Type	Mid-Span
PoE Power Output	Per Port 52V DC, 580mA. Max. 30 watts
Power Pin Assignment	4/5(+), 7/8(-)

Yoda Communications, Inc. [www.yoda.com.tw](http://www.yoda.com.tw)  
 2F, No. 3-1, Industry East Road IX, Science Based Industrial Park, HsinChu, Taiwan  
 Tel:+886-3-563-2323 Fax:+886-3-563-6420



PoE Power Budget	250 watts
<b>Web Smart Switch Function</b>	
Management	Web management, SNMP Trap
VLAN	Port-Based VLAN and IEEE 802.1Q Tag-Based VLAN, up to 16 VLAN groups
QoS	2 priority queues for three type of Class of Service <ul style="list-style-type: none"> <li>• Port-Based</li> <li>• IEEE 802.1p priority tag</li> <li>• TCP / IP header's DSCP classifier</li> </ul> Weighted Round Robin queue scheduling
Bandwidth Control	Inbound Rate Limit and Outbound Traffic shaping
Storm Control	Disable, 12.5%, 25%, 50%, 62.5% 4 levels
<b>Standard Conformance</b>	
EMI Safety	FCC Class A, CE
Operating environment	0~40 degree C, 10%~95%RH
Storage environment	-40 ~70 degree C, 95% RH
Operating Humidity	5% to 90% , relative humidity, non-condensing
Storage Humidity	5% to 90% , relative humidity, non-condensing
Standard Compliance	IEEE 802.3            Ethernet IEEE 802.3u        Fast Ethernet IEEE 802.3x        Flow Control IEEE 802.1p        Class of Service IEEE 802.1Q        VLAN Tagging